



OLDE BRICK

LIGHTING



INSPECTED BY:	INSTALLATION INSTRUCTIONS CHAIN HUNG	
UL LISTED	120V RATED	1-YEAR WARRANTY

Transform spaces. Illuminate experiences.

HELPFUL TOOLS:

measuring tape	philips + flat head screwdrivers	
pliers	wire cutters / strippers	wire nuts

1 CUSTOMIZE Determine your fixture's desired length. If you need to shorten the chain, remove excess links using a chain-link tool or two pairs of pliers. If using pliers, **be careful not to scratch the finish**, grip both sides of a link with the pliers, and twist in opposite directions to open. Remove the links not needed. Once adjusted, reconnect the chain to the ceiling canopy and fixture and close the open link(s) with the pliers. Weave the wiring through the chain.


2 CONNECT Make the appropriate electrical connections according to code requirements. Using wire nuts, connect wiring to junction box with black wire to house hot wire (usually black or red), white to house neutral (usually white) and green to ground if available.

3 MOUNT Run the two longer screws through the mounting bracket threads down away from the ceiling. Use the two shorter screws to mount the bracket to the junction box. Hold canopy to mounting bracket and align the longer screws to the canopy holes. Use the 2 decorative screw caps to fasten the canopy to the mounting bracket.

4 SHADE + BULB If there is a shade with your fixture, loosen the three set screws on the shade holder. Set the shade into place and re-tighten the screws. **Do not over tighten or use tools, this should be done by hand.** Add the appropriate max wattage bulb to the socket and bask in the glow of your new light. If your fixture has a switch, it is a functional switch. It will turn off/on your light fixture but it can be left on and controlled by your light switch or dimmer.



Please use extreme caution and consult a licensed electrician or code professional before starting any project involving electricity. To avoid injury, be sure to shut off the power to the components being worked on. It is the buyer's responsibility to verify that our fixtures will be compliant with local, state, and country electrical and code requirements.

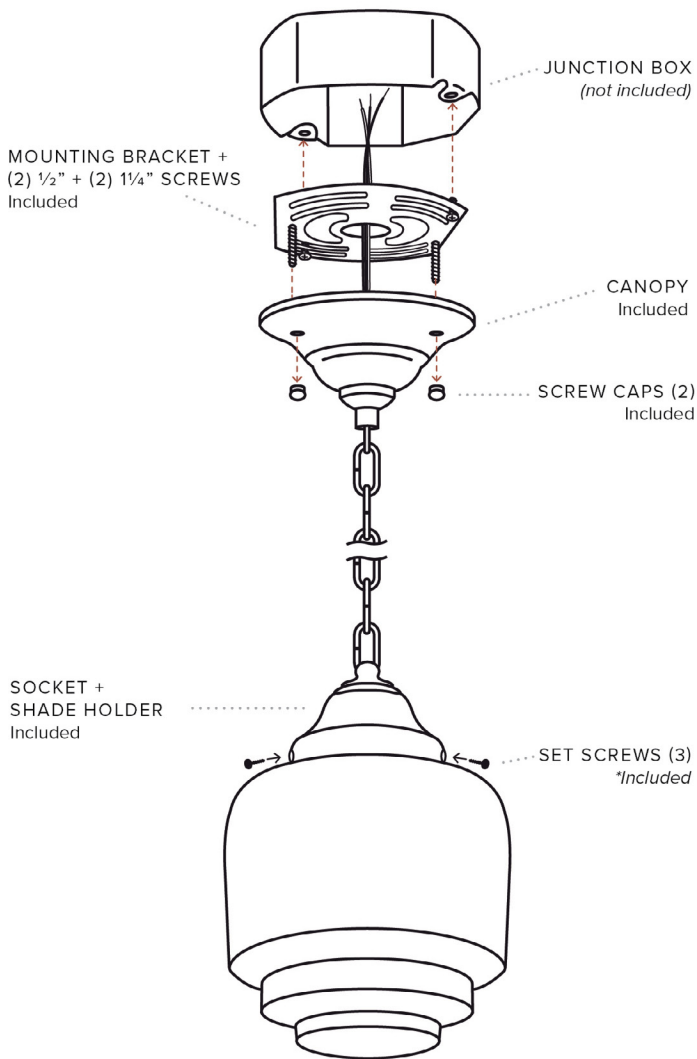

**Features vary by model.*



THANK YOU

(no seriously!)

We're so honored that you chose our lighting to be a part of your space. There's a lot of choices out there but you picked us and that seriously makes our day.

We hope your fixture brings warmth and light to illuminate memorable moments.

-xoxo