



OLDE BRICK

LIGHTING



INSPECTED BY:	INSTALLATION INSTRUCTIONS DOWNROD	
UL LISTED	120V & 240V RATED	1-YEAR WARRANTY

Transform spaces. Illuminate experiences.


HELPFUL TOOLS:

measuring tape	philips + flat head screwdrivers	
pliers	wire cutters / strippers	wire nuts

- 1 CUSTOMIZE** Determine the desired rod length of your fixture. Adjust the length by assembling the combination of rod lengths that equal the desired length. Make sure the rods are threaded together tightly and firmly threaded in to the ceiling canopy.
- 2 CONNECT** Make the appropriate electrical connections according to code requirements. Using wire nuts, connect wiring to junction box with black wire to house hot wire (usually black or red), white to house neutral (usually white) and green to ground if available.
- 3 MOUNT** Run the two longer screws through the mounting bracket threads down away from the ceiling. Use the two shorter screws to mount the bracket to the junction box. Hold canopy to mounting bracket and align the longer screws to the canopy holes. Use the 2 decorative screw caps to fasten the canopy to the mounting bracket.
- 4 SHADE + BULB** If there is a shade with your fixture, loosen the three set screws on the shade holder. Set the shade into place and re-tighten the screws. **Do not over tighten or use tools, this should be done by hand.** Add the appropriate max wattage bulb to the socket and bask in the glow of your new light. If your fixture has a switch, it is a functional switch. It will turn off/on your light fixture but it can be left on and controlled by your light switch or dimmer.



Please use extreme caution and consult a licensed electrician or code professional before starting any project involving electricity. To avoid injury, be sure to shut off the power to the components being worked on. It is the buyer's responsibility to verify that our fixtures will be compliant with local, state, and country electrical and code requirements.

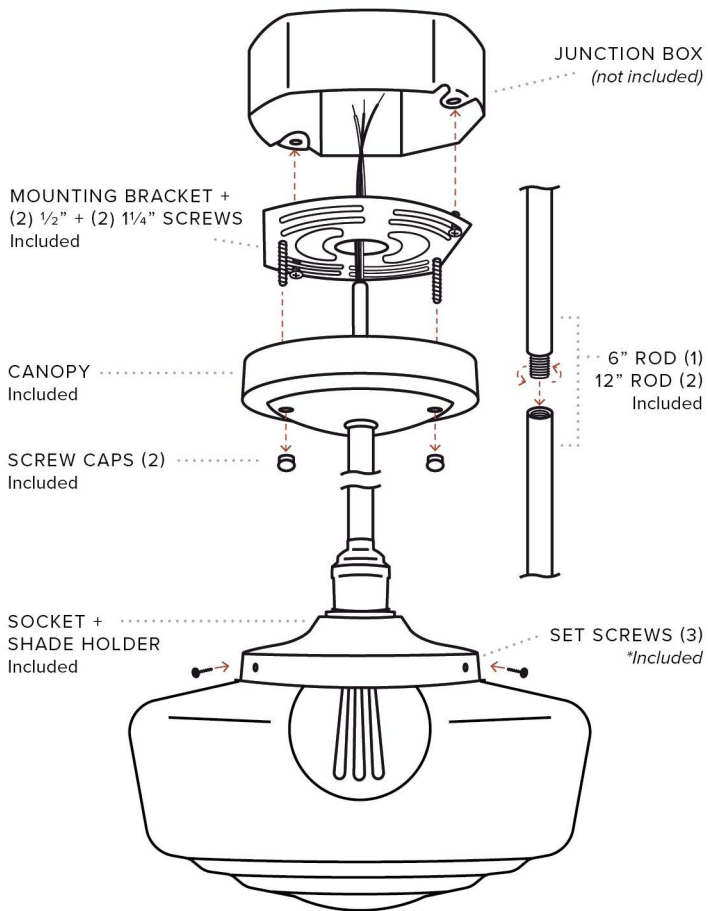

*Features vary by model.



THANK YOU

(no seriously!)

We're so honored that you chose our lighting to be a part of your space. There's a lot of choices out there but you picked us and that seriously makes our day.

We hope your fixture brings warmth and light to illuminate memorable moments.

-xoxo

HELPFUL TOOLS:

allen wrench (included)

bulb

The Bennington shade is a “neckless glass” design.

- 1 SHADE** To install the neckless glass shade, begin by loosening the slip ring directly above the shade cover using the included Allen wrench. Once the ring is loosened, slide it away from the cover and then lift the cover away from the socket and inside plate.
- 2 SOCKET** Insert the socket (bulb in place) and inside plate into the shade. The glass shade will then rest on the inside plate. Next slide the cover back onto the glass shade and hold it into place by sliding the slip ring, back onto the shade cover and tightening it with the Allen wrench
- 3 BULB CHANGE OR CLEANING** To remove or install the glass for cleaning or bulb change you would simply loosen the slip ring located directly above the shade cover by turning counter clockwise a half turn. Slide the slip ring and shade cover upwards on the down rod and lift and remove the glass globe. The glass globe rests on the inside plate. When reinstalling the glass be sure to seat the opening of the glass on the inside plate on the recessed portion and place the shade cover and slip ring back into place and retighten slip ring.

BENNINGTON SHADE



Please use extreme caution and consult a licensed electrician or code professional before starting any project involving electricity. To avoid injury, be sure to shut off the power to the components being worked on. It is the buyer's responsibility to verify that our fixtures will be compliant with local, state, and country electrical and code requirements.

